

PS20

Personal Shopper

Accessories Guide



PS20 Configurations

| Model | Part Number | Description | Comments |
|-----------|-----------------------|--|-----------------------|
| PS20-Base | PS20J-B2G1NA00 | PS20 Base Model, 4" Display, SE2100, 4GB RAM/16GB Flash, Android GMS, No-Camera, No-Sensors, 1YR Warranty, US/PR/Canada | Single Pack PS20 Base |
| PS20-Base | PS20J-B2G1A600 | PS20 Base Model, 4" Display, SE2100, 4GB RAM/16GB Flash, Android GMS, No-Camera, No-Sensors, 1YR Warranty, ROW | Single Pack PS20 Base |
| PS20-Base | PS20J-B2G2CN00 | PS20 Base Model, 4" Display, SE2100, 4GB RAM/16GB Flash, Android Non-GMS, No-Camera, No-Sensors, 1YR Warranty, China | Single Pack PS20 Base |
| PS20-Base | KT-PS20J-B2G1NA00 | PS20 Base Model, 4" Display, SE2100, 4GB RAM/16GB Flash, Android GMS, No-Camera, No-Sensors, 1YR Warranty, US/PR/Canada, Pack of 10 Units | 10 Pack PS20 Base |
| PS20-Base | KT-PS20J-B2G1A600 | PS20 Base Model, 4" Display, SE2100, 4GB RAM/16GB Flash, Android GMS, No-Camera, No-Sensors, 1YR Warranty, ROW, Pack of 10 Units | 10 Pack PS20 Base |
| PS20-Base | KT-PS20J-B2G2CN00 | PS20 Base Model, 4" Display, SE2100, 4GB RAM/16GB Flash, Android Non-GMS, No-Camera, No-Sensors, 1YR Warranty, China, Pack of 10 Units | 10 Pack PS20 Base |
| PS20-Plus | P< /(1 -PΔ(-1 N Δ()() | PS20 Plus Model, 4" Display, SE4710+Digimarc, 4GB RAM/16GB Flash, Android GMS, Camera, Sensors, 1YR Warranty, US/PR/Canada | Single Pack PS20 Plus |
| PS20-Plus | PS20J-P4G1A600 | PS20 Plus Model, 4" Display, SE4710+Digimarc, 4GB RAM/16GB Flash, Android GMS, Camera, Sensors, 1YR Warranty, ROW | Single Pack PS20 Plus |
| PS20-Plus | P<101-PΔ(31(NO) | PS20 Plus Model, 4" Display, SE4710+Digimarc, 4GB RAM/16GB Flash, Android Non-GMS, Camera, Sensors, 1YR Warranty, China | Single Pack PS20 Plus |
| PS20-Plus | KT-PS20J-P4G1NA00 | PS20 Plus Model, 4" Display, SE4710+Digimarc, 4GB RAM/16GB Flash, Android GMS, Camera, Sensors, 1YR Warranty, US/PR/Canada, Pack of 10 Units | 10 Pack PS20 Plus |
| PS20-Plus | KT-PS20J-P4G1A600 | PS20 Plus Model, 4" Display, SE4710+Digimarc, 4GB RAM/16GB Flash, Android GMS, Camera, Sensors, 1YR Warranty, ROW, Pack of 10 Units | 10 Pack PS20 Plus |
| PS20-Plus | KT-PS20J-P4G2CN00 | PS20 Plus Model, 4" Display, SE4710+Digimarc, 4GB RAM/16GB Flash, Android Non-GMS, Camera, Sensors, 1YR Warranty, China, Pack of 10 Units | 10 Pack PS20 Plus |

Spare batteries





BTRY-PS20-35MA-01

PowerPrecision+ Lithium Ion battery, 3500 mAh, provides advanced State of Charge and State of Health, compatible with all PS20 configurations and cradles.

Pack of 10 units: BTRY-PS20-35MA-10

Spare batteries:

PowerPrecision + Batteries provide an advanced new battery technology integrated into our newest devices bringing a higher level of intelligence to deliver maximum performance.

This battery is compatible with all PS20 configurations while using any MC18 single and 3-slot cradles:

- Compatible with PS20 only
- Compatible with Level V and Level VI power supplies
- Compatible with single and 3-slot cradles
- Supports standard and fast charging modes
- Not compatible with MC18 terminals

Main features:

Information stored on each PowerPrecision+battery:

- Continuously updated capacity as battery ages
- Charge accepted per type of charger
- Time to fully charge and time to fully discharge
- Elapsed time since first use
- Dynamically models the battery life based on historical usage

Supported features:

- Advanced state of health: actively measures and calculates the battery capacity under standard load conditions and temperature
- Advanced state of charge: time to empty under present usage and time to full under present charge condition

Cradle options

Single slot cradle



Single Slot Locking Cradle:

CRD-MC18-1SLOT-01

Single Slot Locking Cradle, keeps the device with display facing out. Compatible with MC18 and all configurations of PS20.

Requires: Power Supply PWR-BGA12V108W0WW, DC line cord and Country Specific AC line cord sold separately.

Additional accessories for single slot cradle



PWR-BGA12V108W0WW

Level VI AC/DC power supply. **AC Input:** 100-240V, 2.8A. **DC Output:** 12V, 9A, 108W Requires: DC line cord and country specific grounded AC line cord.



CBL-DC-394A1-01

DC Line Cord 19.5inch (0.5M) for powering one cradle from a single power supply. Supports interconnected cradles to charge maximum 6 devices depending on charging mode required.



CBL-DC-393A1-02

DC "Y" Line Cord 39.7inch (1M) for powering two cradles from a single power supply. Supports interconnected cradles to charge maximum 12 devices (up to 6 devices powered off each leg of the cable) depending on charging mode required.



CBL-DC-392A1-02

DC "Y" Line Cord 79.4inch (2M) for powering two cradles from a single power supply. Supports interconnected cradles to charge maximum 12 devices (up to 6 devices powered off each leg of the cable) depending on charging mode required.



25-66430-01R

Cradle Interconnection Cable 60 Inch (1.5M) Connects Cradles to each other to run off one power supply.



25-66431-01R

Cradle Interconnection Cable 12.6 Inch (32cm) Connects Cradles to each other to run off one power supply

Single Slot Cradle Charge Methods

Step 1: Power Supply

Level VI power supply **PWR-BGA12V108W0WW** and country specific 3-wire AC Line Cord.



Step 2: Charge Mode

Choose required charging mode.

Fast – 1.5 AMPS:

MAX: 9 Single Slot Cradles/Devices

Standard - 1.0 AMP:

MAX: 12 Single Slot Cradles/Devices

Step 3: DC Line Cord

Select one **DC Cable** to connect a power supply to multiple single slot cradles depending on charge mode:

| CBL-DC- 394A1-01 | DC Line Cord 19.5inch (0.5M). Supports up to 6 single slot cradles. |
|---------------------|---|
| CBL-DC- 393A1-02 | DC "Y" Line Cord 39.7inch (1M). Supports up to 12 single slot cradles (max 6 cradles powered off each leg of the cable) |
| CBL-DC- 392A1-02 | DC "Y" Line Cord 79.4inch (2M). Supports up to 12 single slot cradles (max 6 cradles powered off each leg of the cable) |

Step 4: Interconnect cables

Choose the number of cradle interconnect cables required based on charge mode and following the table below.

Fast Charge Mode

9 Single Slot Cradles Maximum per power supply. No more than 6 single slot cradles can be powered off each leg if a "Y" power cable is used.



| Number of Cradles | 2 | 3 | 4 | 5 | 6 |
|-----------------------------------|---|---|---|---|---|
| # of Interconnect Cables required | | 2 | 3 | 4 | 5 |
| Number of Cradles | 7 | | 8 | | 9 |
| # of Interconnect Cables required | 5 | | 6 | | 7 |

Standard Charge Mode

12 Single Slot Cradles Maximum per power supply. No more than 6 single slot cradles can be powered off each leg if a "Y" power cable is used.



| Number of Cradles | 2 | 3 | | 4 | 5 | 6 |
|-----------------------------------|---|---|---|----|----|----|
| # of Interconnect Cables required | 1 | 2 | | 3 | 4 | 5 |
| Number of Cradles | 7 | 8 | 9 | 10 | 11 | 12 |
| # of Interconnect Cables required | 5 | 6 | 7 | 8 | 9 | 10 |

Single Slot Cradle Charge Methods

| | | Fast Charge Mode @1.5AMP (no more than 9 devices in total per power supply) | | Standard Charge Mode @1AMP (no more than 12 devices in total per power supply) | | |
|--|--|---|--------------------------|---|---------------------------|--|
| | | Total Cradles Supported | Total Devices Supported | Total Cradles Supported | Total Devices Supported | |
| | With DC Cable: CBL-DC- 394A1-01 | Up to 6 single slot cradles in total daisy chained using interconnection cable: 25-66431-01R | Up to 6 devices in total | Up to 6 cradles in total daisy chained using interconnection cable: 25-66431-01R | Up to 6 devices in total | |
| Single Slot Cradle CRD-MC18- 1SLOT-01 | With DC "Y" Cable: CBL-DC- 393A1-02 With DC "Y" Cable: CBL-DC- 392A1-02 | Up to 6 single slot cradles on each "leg" of the "Y" cable daisy chained using interconnection cable: 25-66431-01R Note: No more than 9 cradles in total | Up to 9 devices in total | Up to 6 single slot cradles on each "leg" of the "Y" cable daisy chained using interconnection cable: 25-66431-01R Note: No more than 12 cradles in total | Up to 12 devices in total | |

Cradle options

3-slot cradles



3-Slot Cradles:

CRD-MC18-3SLOTH-01

3-Slot Non-Locking High Density Cradle, display facing out. Compatible with MC18 and PS20.

CRD-MC18-3SLCKH-01

3-Slot Locking High Density Cradle, display facing out. Compatible with MC18 and PS20.

CRD-MC18-3SLCKS-01

3-Slot Locking Super High Density Cradle, display facing up. Compatible with MC18 and PS20.

All cradles require: Power Supply PWR-BGA12V108W0WW, DC line cord and Country Specific AC line cord sold separately.

Additional accessories for single slot cradle



PWR-BGA12V108W0WW

Level VI AC/DC power supply. **AC Input:** 100-240V, 2.8A. **DC Output:** 12V, 9A, 108W. <u>Requires:</u> DC line cord and country specific grounded AC line cord.



CBL-DC-394A1-01

DC Line Cord 19.5inch (0.5M) for powering one cradle from a single power supply. Supports interconnected cradles to charge maximum 6 devices depending on charging mode required.



CBL-DC-393A1-02

DC "Y" Line Cord 39.7inch (1M) for powering two cradles from a single power supply. Supports interconnected cradles to charge maximum 12 devices (up to 6 devices powered off each leg of the cable) depending on charging mode required.



CBL-DC-392A1-02

DC "Y" Line Cord 79.4inch (2M) for powering two cradles from a single power supply. Supports interconnected cradles to charge maximum 12 devices (up to 6 devices powered off each leg of the cable) depending on charging mode required.



25-66430-01R

Cradle Interconnection Cable 60 Inch (1.5M) Connects Cradles to each other to run off one power supply.



25-66431-01R

Cradle Interconnection Cable 12.6 Inch (32cm) Connects Cradles to each other to run off one power supply



CBL-MC18-EXINT1-01

Cradle Interconnection Extension Cable 12.6 Inch (32cm). Connects two Interconnection cables 25-66431-01R together to provide additional length.

3-Slot Cradle Charge Methods

Step 1: Power Supply

Level VI power supply **PWR-BGA12V108W0WW** and country specific 3-wire AC Line Cord.



Step 2: Charge Mode

Choose required charging mode.

Fast – 1.5 AMPS:

MAX: 3 x 3-Slot Cradles, total of 9 Devices

Standard - 1.0 AMP:

MAX: 4 x 3-Slot Cradles, total of 12 Devices

Step 3: DC Line Cord

Select one **DC Cable** to connect a power supply to multiple 3-slot cradles depending on charge mode:

| CBL-DC- 394A1-01 | DC Line Cord 19.5inch (0.5M). Supports up to two 3-slot cradles. |
|---------------------|--|
| CBL-DC- 393A1-02 | DC "Y" Line Cord 39.7inch (1M). Supports up to four 3-slot cradles (max 2 cradles powered off each leg of the cable) |
| CBL-DC- 392A1-02 | DC "Y" Line Cord 79.4inch (2M). Supports up to four 3-slot cradles (max 2 cradles powered off each leg of the cable) |

Step 4: Interconnect cables

Choose the number of cradle interconnect cables required based on charge mode and following the table below.

Fast Charge Mode

3 Three-Slot Cradles Maximum per power supply. No more than 2 cradles can be powered off each leg if a "Y" power cable is used.



Cradle Interconnect Cables 25-66431-01R (12.6inch, 32cm)



Interconnection Extension Cable (12.5inch, 32cm): CBL-MC18-EXINT1-01

| Number of Cradles | 2 | 3 |
|-----------------------------------|---|---|
| # of Interconnect Cables required | 1 | 1 |
| # of Extension Cables required | 2 | 3 |

Standard Charge Mode

4 Three-Slot Cradles Maximum per power supply. No more than 2 cradles can be powered off each leg if a "Y" power cable is used.




Cradle Interconnect Cables 25-66431-01R (12.6inch, 32cm)

Interconnection Extension Cable (12.5inch, 32cm):

CBL-MC18-EXINT1-01

| Number of Cradles | 2 | 3 | 4 |
|-----------------------------------|---|---|---|
| # of Interconnect Cables required | 1 | 1 | 2 |
| # of Extension Cables required | 2 | 3 | 4 |

3-Slot Cradle Charge Methods

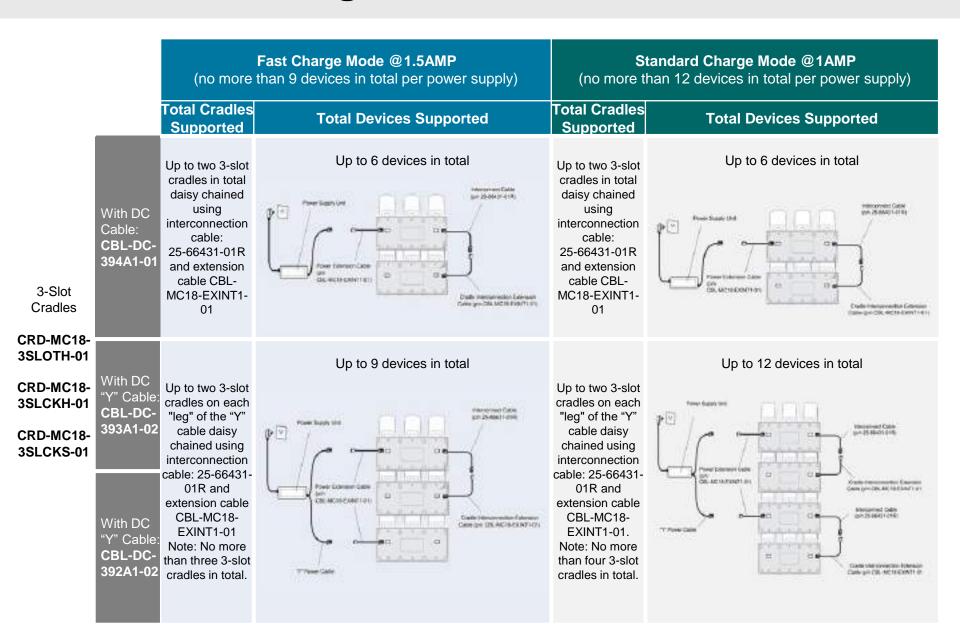

Other cradle accessories

Cradle Release Key



KT-MC18-CKEY-20

Used to mechanically unlock the PS20 from the 3-Slot & Single-Slot Cradles. Pack of 20 units.

Cradle Cover Removal Tool



KT-MC18-CTOOL-01

This tool aids in the removal of the top housing of the 3-Slot Cradles. Pack of 1 unit.

Terminal Reboot Tool



KT-MC18-REBOOT-05

This tool can be used to reboot the PS20 by holding the pins on the tool to the terminal while holding down the scan key for 10 seconds. Pack of 5 units.

Deployment Starter Kit



KT-MC18-CSTKIT-01

PS20 Deployment Starter Kit. Includes 20-pack of Release Keys (KT-MC18-CKEY-20), 5-pack of Terminal Reboot Tool (KT-MC18-REBOOT-05), and 1 Cradle Housing Tool (KT-MC18-CTOOL-01).

Other PS20 accessories

USB Programing Cable



CBL-PS20-USBCHG-01

PS20 USB cable, also allows USB communication to the device when connected to a PC.

Soft Holster



SG-PS20-SFTHLT-01

PS20 Soft Holster, allows to wear the device on the hip (includes belt clip) or crossbody with an additional shoulder strap (part number 58-40000-007R).

Cart Mount



PSS-3SH01-00R

Cart mount, allows mounting the PS20 mobile computer on a shopping cart, it also allows to use the device on hands-free scanning mode.

Screen Protector



MISC-PS20-SCRN-05

PS20 Tempered glass screen protector (Qty. 5)

Other accessories

Country specific 3-wire AC line cords

| Part Number | Description |
|---------------|--|
| 23844-00-00R | AC line cord, 7.5 feet long, grounded, three wire. Associated Country: US |
| 50-16000-217R | AC Line Cord, 1.9M, grounded, three wire, AS 3112 plug. Associated Country: Australia, New Guinea |
| 50-16000-218R | AC Line Cord, 1.8M, grounded, three wire, NEMA 1-15P plug. Associated Country: Japan |
| 50-16000-219R | AC Line Cord, 1.8M, three wire, grounded BS1363 plug. Associated Countries: Hong Kong, Iraq, Malaysia, Singapore, United Kingdom |
| 50-16000-220R | AC Line Cord, 1.8M, grounded, three wire CEE 7/7plug. Associated Countries: Europe, Abu Dhabi, Bolivia, Dubai, Egypt, Iran, Korea, Russia, Vietnam |
| 50-16000-256R | AC Line Cord, 1.8M, grounded, three wire, CEE7/7 plug. Associated Country: Korea |
| 50-16000-257R | AC Line Cord, 1.8M, grounded, three wire, IEC 60320 C13 plug. Associated Country: China |
| 50-16000-669R | AC Lind Cord, 1.9 M grounded, three wire, BS 546 Plug. Associated Country: India |
| 50-16000-671R | AC Line Cord, 1.8M grounded, CIE 23-16 plug. Associated Country: Italy |
| 50-16000-672R | AC Line Cord, 1.9M grounded, three wire, S132 Plug. Associated Country: Israel |
| 50-16000-727R | AC Line Cord, 1.9M grounded, three wire. Associated Country: Brazil |
| | |